

QV - Derailleur cable replacement - 11 speed




- 5mm Allen key - short
- 3mm Allen key
- cable pliers
- new derailleuer cable
1,1 mm thick,
2200 mm long

Undo the derailleuer cable trough the hatch underneath your QV.

Put the shifter in first gear.

You will need a (short) 5 mm Allen key (pic 1).

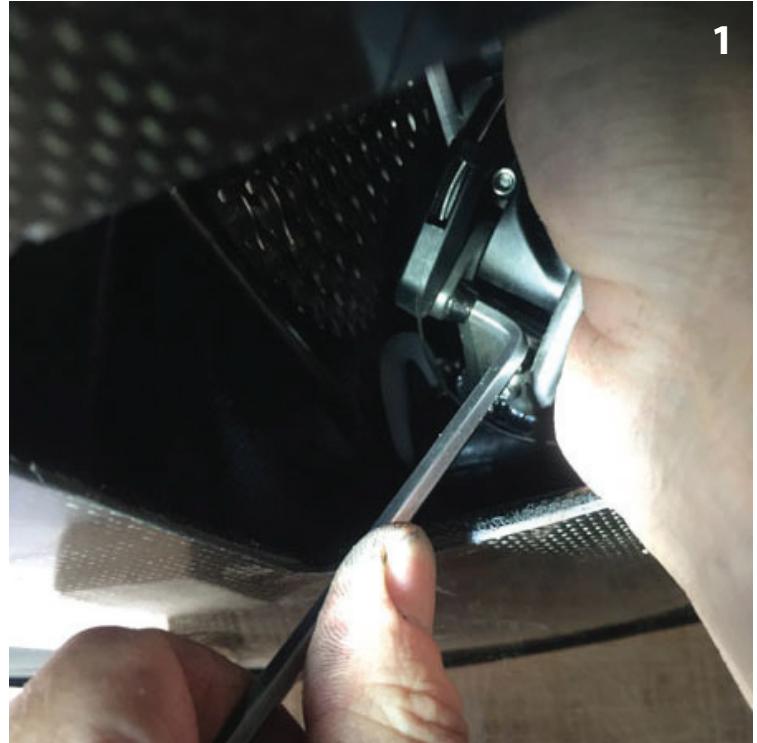

Take the trigger shifter off the tiller with a 3 mm Allen key (pic 2).




Take the cover of the shifter with a 3 mm Allen key (pic 3).




Derailleur cable replacement - 11 speed

Push cable A out (lift the spring) and screw in adjuster B (pic 4).

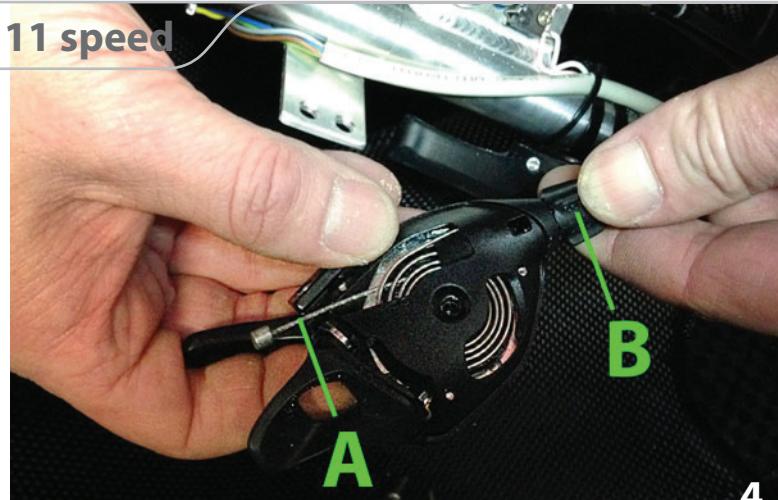

To make things clear in the photos we took the derailleur out of the QV.
You don't need to do that! You can change the cable through the hatch.


Bend the cable like in the photo 5.

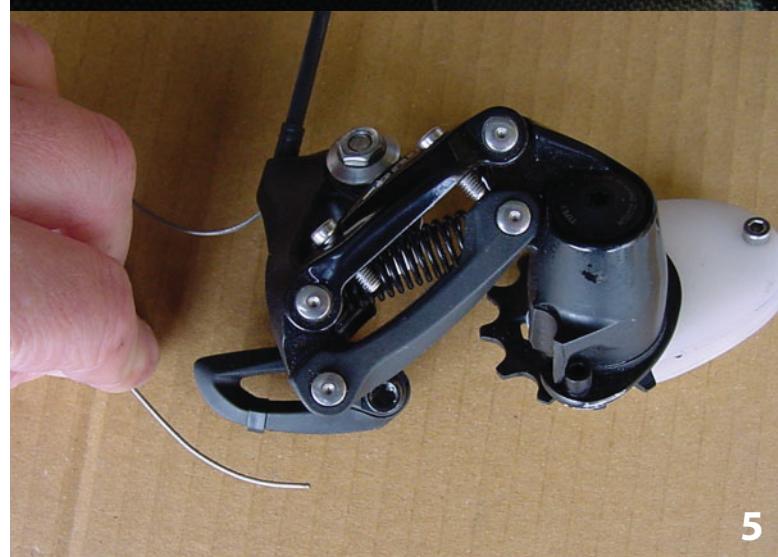

You can guide the cable directly through the loop and the hole underneath the retaining bolt (pic 6).



Do not unscrew the bolt too far, the square nut will fall out (pic 7).

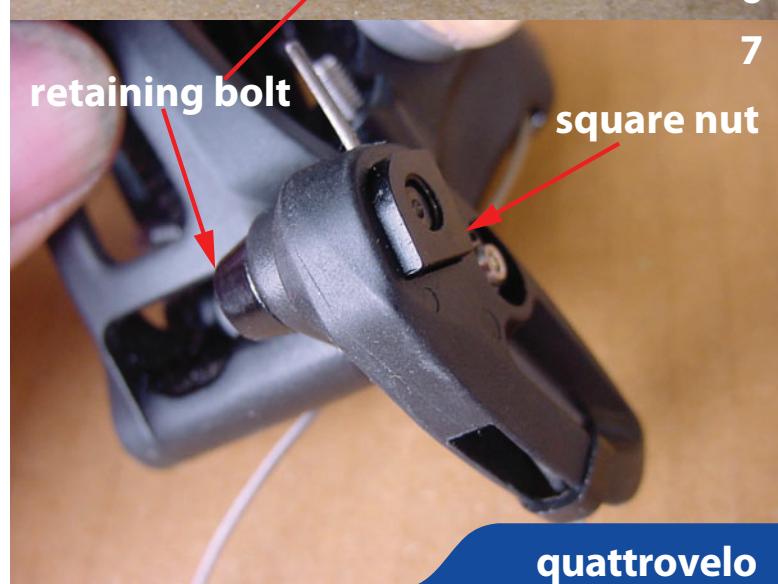

Derailleur cable replacement - 11 speed

Push the derailleur to the 1st gear position and pull the cable tight.
Tighten the retaining bolt lightly allowing the cable to slip through (pic 8).



Move the derailleur to 11th gear while the cable slips underneath the bolt then tighten the bolt (pic 9).
(Don't overdo it, the square nut and thread is made of aluminum)
Adjust the derailleur.

